



ISHAN TOP

SIZES XS - 4XL

VIEW A

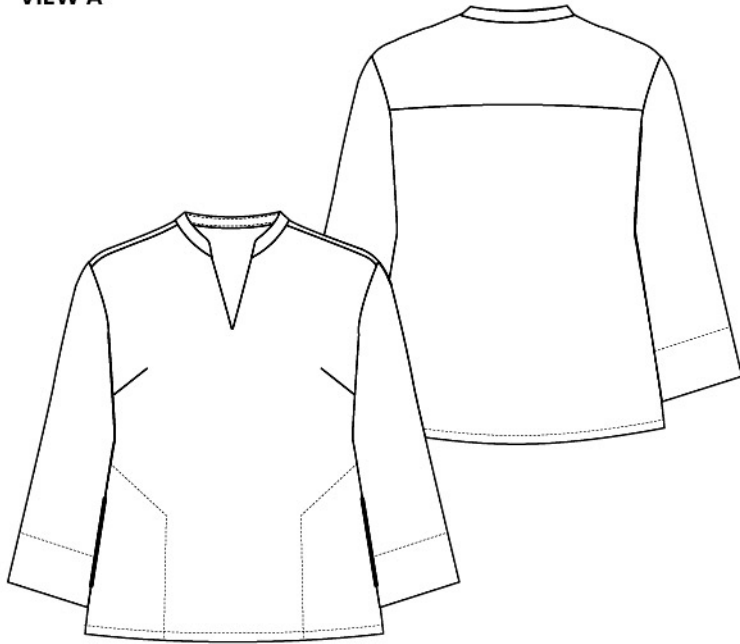

VIEW B

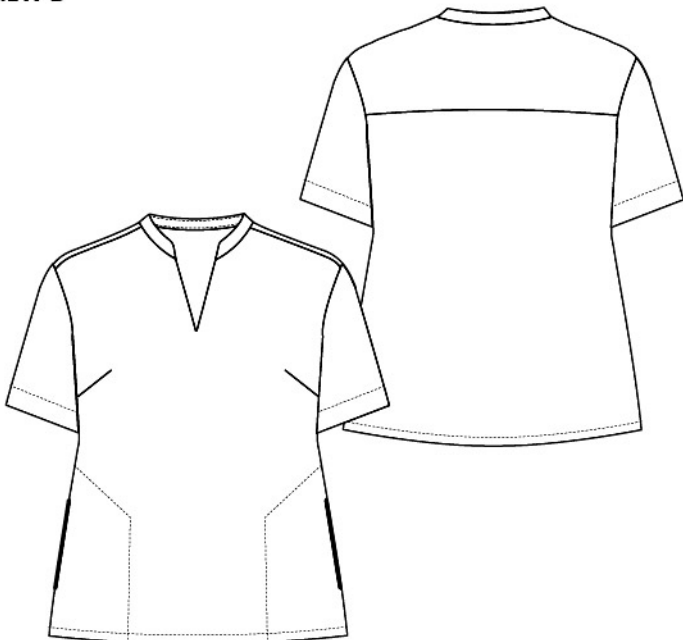

DESCRIPTION:

The Ishan top comes with two sleeve options - a longer sleeve for more coverage and a shorter sleeve when you want something a little lighter. Same beautiful notched neck-line, same relaxed body, same confidence either way. Comfortable through the body with thoughtful shaping at the shoulders and a clean yoke detail in the back. She layers beautifully under a jacket, looks polished on her own with a great pair of pants, and works just as well for a quick coffee run as she does for a meeting.

DIFFICULTY LEVEL:

Confident Beginner

RECOMMENDED FABRICS:

Light to medium weight woven fabric such as cotton shirtings, cotton lawn, chambray, linen, cotton voile, double gauze, rayon crepe, rayon challis, and silk.

NOTIONS REQUIRED:

- All-purpose sewing thread
- Fusible Interfacing

CHOOSING A SIZE

This pattern is drafted for a B cup bust and 5'4" (164.59cm) height. If in-between sizes, size up/down. I recommend making a muslin if you are unsure of your size and to ensure a perfect fit.

GRADING BETWEEN SIZES


The pattern is nested so that you can grade between sizes if necessary. Simply print the sizes you need and draw a diagonal line between the sizes to grade between them.

HOW TO LENGTHEN/SHORTEN

Use the 'LENGTHEN OR SHORTEN HERE' lines on the pattern to lengthen or shorten your pattern.

FIT ISSUES/SOLUTIONS

Generally when fitting patterns, use your bust measurements to select your size. If your waist or hip measurement needs to be larger or smaller size up or down.

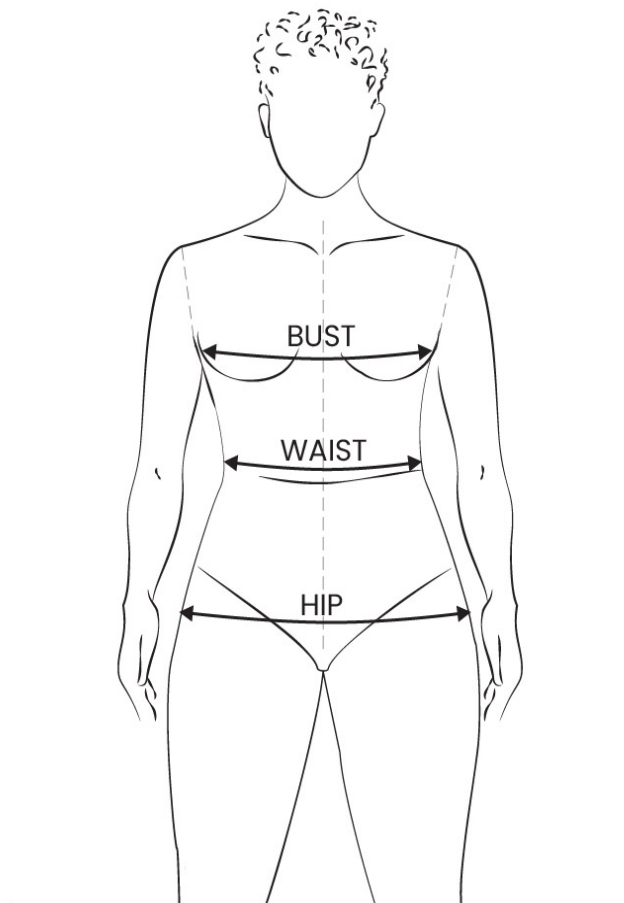

NOTES ON EASE

How to find how much ease is in your garment?

Compare your body measurement with the garment's finished body measurements. The difference determines how much ease is in your garment.

ISHAN

The Ishan Top is fitted at the bust and hips and semi-fitted at the waist.

EASE KEY

FITTED 0 - 3" (0 - 8cm)
SEMI-FITTED 4 - 6" (10 - 15.5cm)
LOOSE-FITTED 7" & up (18cm & up)

IMPERIAL FABRIC & SIZING

BODY MEASUREMENTS (INCHES)

SIZE	0	2	4	6	8	10	12	14	16	18	20	22	24	26	28	30
	XS		S		M		L		XL		2XL		3XL		4XL	
CHEST	32	34	35	37	38	40	41	43	44	46	47	49	50	52	53	55
WAIST	25	27	28	30	31	33	34	36	37	39	40	42	43	45	46	48
HIP	34	36	37	39	40	42	43	45	46	48	49	51	52	54	55	57

FABRIC REQUIREMENTS (YARDS)

45"	2 1/2	2 1/2	2 1/2	2 1/2	3 1/8	3 1/8	3 1/8	3 1/8
60"	1 3/4	1 3/4	1 3/4	1 3/4	2 1/2	2 1/2	2 1/2	2 1/2

FINISHED GARMENT (INCHES)

CHEST	34	37	40	43	46	49	52	55
WAIST	33	36	39	42	45	48	51	54
HIP	38	41	44	47	50	53	56	59
SLEEVE LENGTH A	21 3/4	22	22 1/4	22 1/2	22 3/4	23	23 1/4	23 1/2
SLEEVE LENGTH B	10	10 1/4	10 1/2	10 3/4	11	11 1/4	11 1/2	11 3/4
LENGTH FROM CB	25 1/2	26	26 1/2	27	27 1/2	28	28 1/2	29

METRIC FABRIC & SIZING

BODY MEASUREMENTS (CENTIMETERS)


	0	2	4	6	8	10	12	14	16	18	20	22	24	26	28	30
	XS		S		M		L		XL		2XL		3XL		4XL	
CHEST	81.3	86.4	88.9	94	96.5	101.6	104.1	109.2	111.7	116.8	119.3	124.5	127	132.1	134.6	139.7
WAIST	63.5	68.6	71.12	76.2	78.7	83.8	86.4	91.4	94	99.1	101.6	106.7	109.2	114.3	116.8	121.9
HIP	86.4	91.4	94	99.1	101.6	106.7	109.2	114.3	116.9	121.9	124.5	129.5	132.1	137.2	139.7	144.8

FABRIC REQUIREMENTS (METERS)

45"	2.3	2.3	2.3	2.3	2.9	2.9	2.9	2.9
60"	1.6	1.6	1.6	1.6	2.3	2.3	2.3	2.3

FINISHED GARMENT (CENTIMETERS)

CHEST	86.4	94.0	101.6	109.2	116.8	124.5	132.1	139.7
WAIST	83.8	91.4	99.1	106.7	114.3	121.9	129.5	137.2
HIP	96.5	104.1	111.8	119.4	127.0	134.6	142.2	149.9
SLEEVE LENGTH A	55.2	55.9	56.5	57.2	57.8	58.4	59.1	59.7
SLEEVE LENGTH B	25.4	26.0	26.7	27.3	27.9	28.6	29.2	29.8
LENGTH FROM CB	64.8	66.0	67.3	68.6	69.9	71.1	72.4	73.7

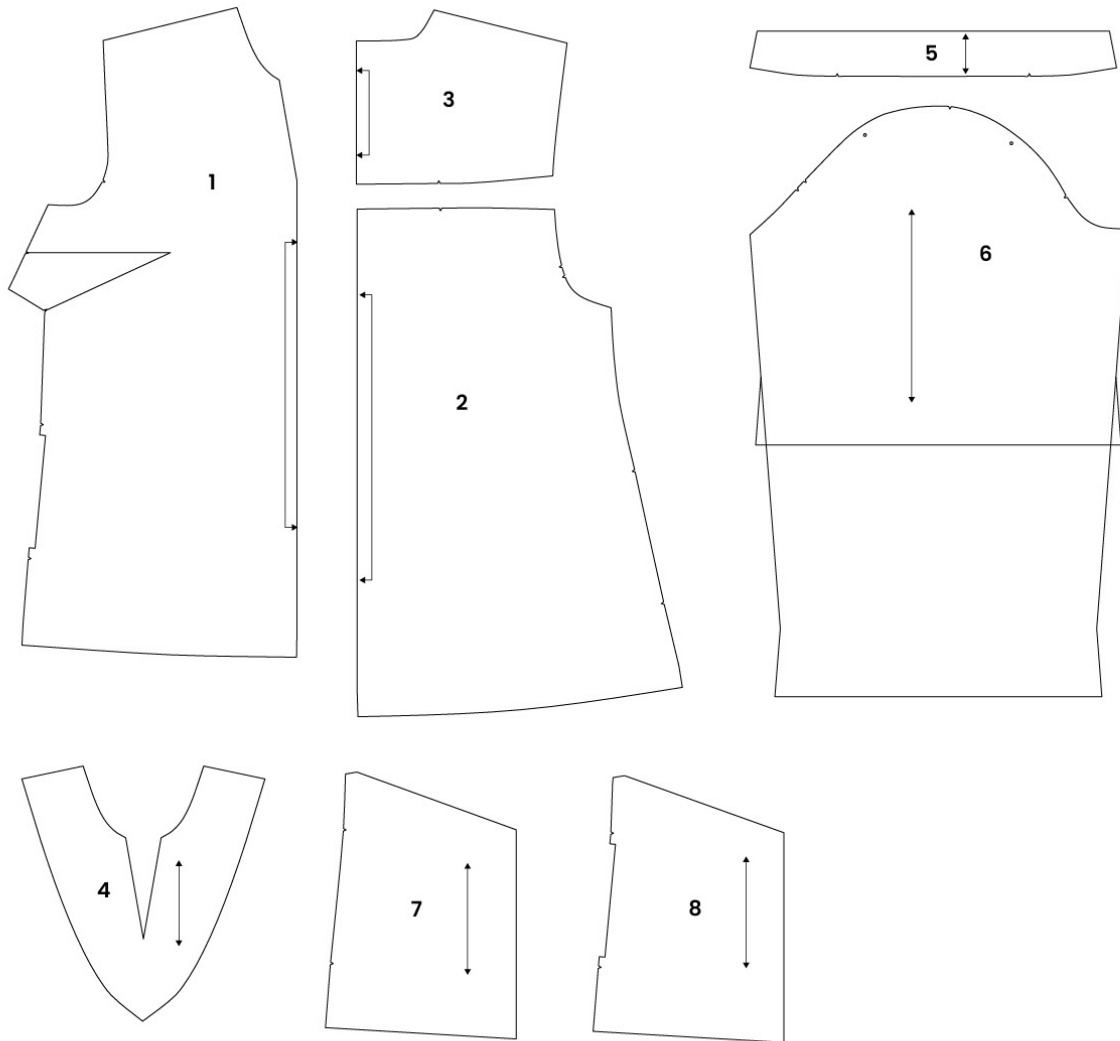

1. FRONT

2. BACK

3. BACK YOKE

4. FRONT FACING

5. COLLAR

6. SLEEVE

7. POCKET

8. POCKET FACING


PRINTING THE PATTERN

6

PRINTING LAYERS INSTRUCTIONS

This pattern includes layered pattern tiles that allow you to choose only the sizes you wish to print. In Acrobat Reader, click on the layers icon while the file is open. Click on the eyeball to turn size layers on or off. Be sure to leave the 'Info For All Sizes' and 'Tile Marking' layers turned on.

Be sure to set your printer to not scale the pattern pieces by selecting either "Actual Size" or "Custom Scale: 100%" in your print dialog.

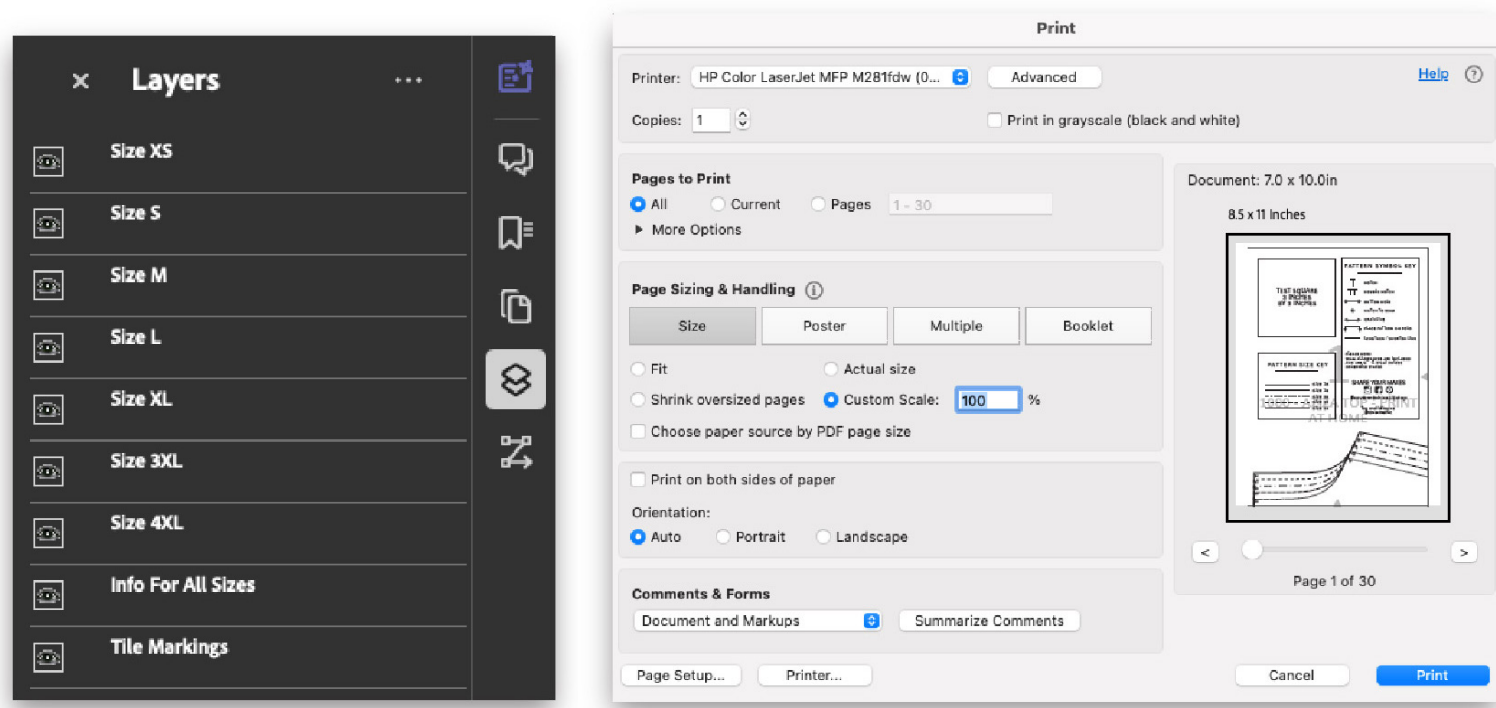

COPY SHOP PRINTING

There are two wide format versions that can be printed at a copy shop. The width of the A0 file is 33.1" x 46.8" (84 x 119 cm) and the US copy shop size is 36" x 48". The copy shop file can also be printed continuously on 36" wide paper.

There are two pages in both formats. Check with your intended printer for detailed submission information. Be sure to tell them to not scale the PDF!

TILE ASSEMBLY & TAPING INSTRUCTIONS


Each page includes a transparent number to show how it should be organized. Tiles 1-5 run across the top of the pattern, the subsequent tiles follow below.

Cut one long side and one short side @ the boarder of each page. Stay consistent when cutting. Align the diamonds so that they matches up according to the layout shown on this page.

This tiled version can be printed on both A4 or US letter-sized paper and contains all of the XS -4X pattern pieces.

Make sure to check the 3" or 5cm scaling square on the pattern before printing all pages.

TEST SQUARE EXAMPLE

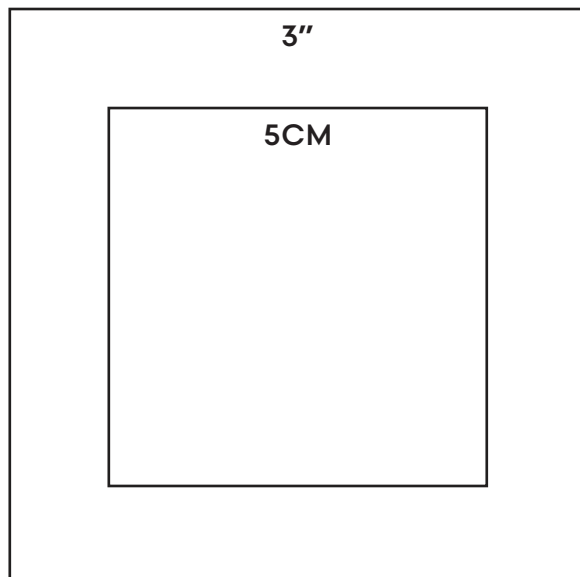

SIZE XS - 4XL

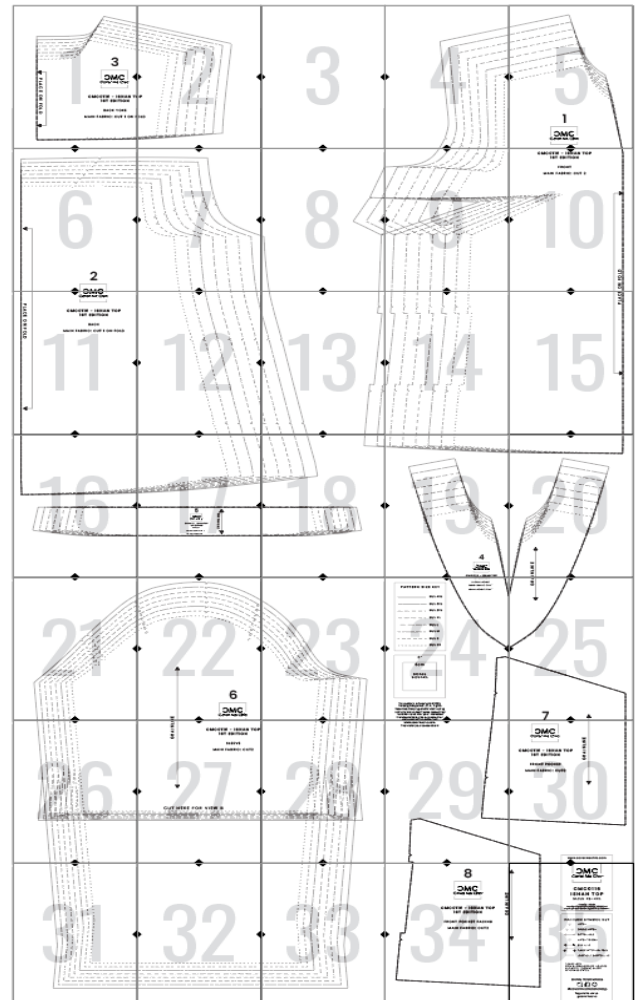


ILLUSTRATION KEY



FABRIC: RIGHT SIDE




FABRIC: WRONG SIDE




PATTERN: WRONG SIDE


SIZES XS-L: 60"/152.4CM

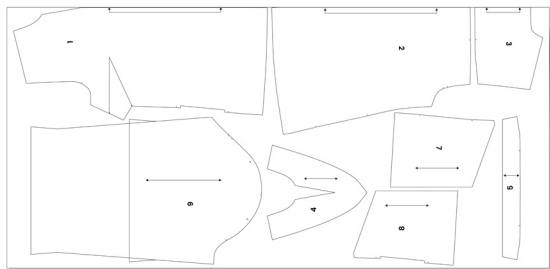

SIZES XS-L: 44"/111.76CM

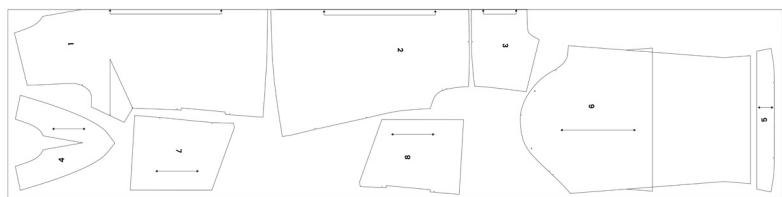

SIZES XL-4XL: 60"/152.4CM

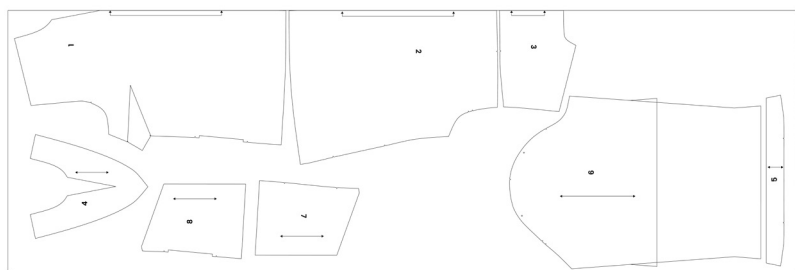

SIZES XL-4XL: 44"/111.76CM


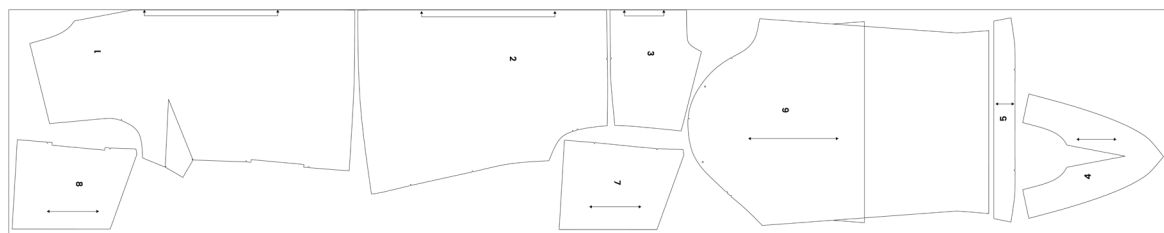



ILLUSTRATION KEY




FABRIC: RIGHT SIDE




FABRIC: WRONG SIDE



INTERFACING



LINING: RIGHT SIDE




LINING: WRONG SIDE

SEAM ALLOWANCE


Use 1/2" (1.27cm) seam allowances unless otherwise indicated

FRONT FACING

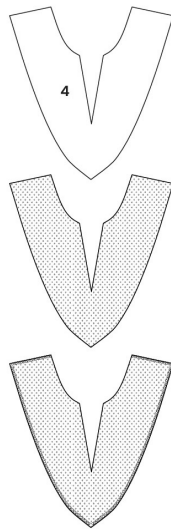


1. Fuse (press) interfacing to wrong side of front facing (4).
2. Finish outer edge and around shoulder.

COLLAR

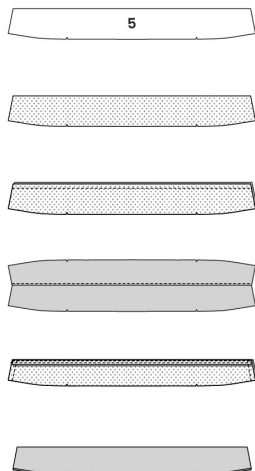


1. Fuse (press) interfacing to wrong side of one collar (5) piece.
2. Place both collar (5) pieces right sides together (RST).
3. Sew along the top edge.
4. Under stitch on fused collar piece
5. Sew both sides edges and clip edges
6. Turn right side out and press flat.

FRONT

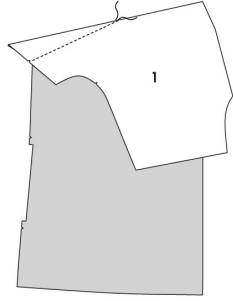


1. Fold dart in half match notches and dart legs
2. Sew from notch to dart apex
3. Press dart down


FRONT POCKETS

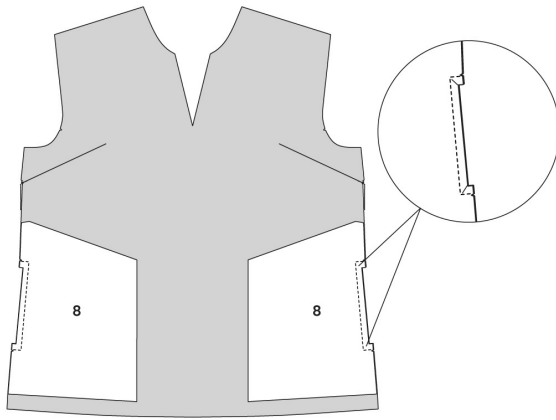


1. Sew pocket facing (8) to front (1) right sides together at pocket opening, matching notches.
2. Clip seam allowance at each end of pocket opening at right angles.

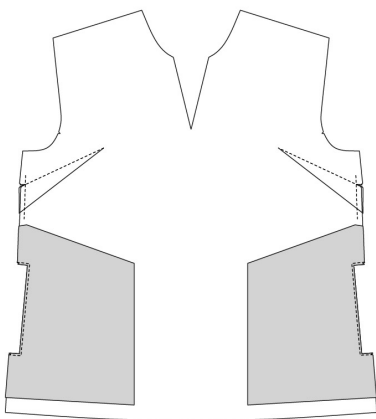

1. Turn pocket facing right side out
2. Press flat.
3. Top stitch pocket opening 1/8" (.3175 cm) from edge (optional)

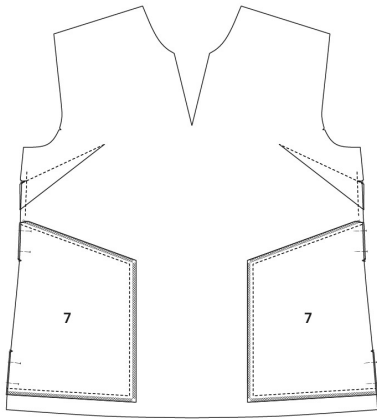


1. Sew pocket (7) to pocket facing (8) right sides together around top, side, and bottom — leaving the side seam edge open.
2. Finish edges around three sewn sides.

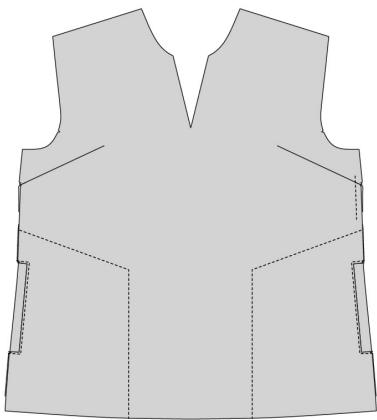


1. Top stitch around pocket edge at top and side on front 1/8" (.3175cm) from edge. (optional)

ATTACH FRONT FACING

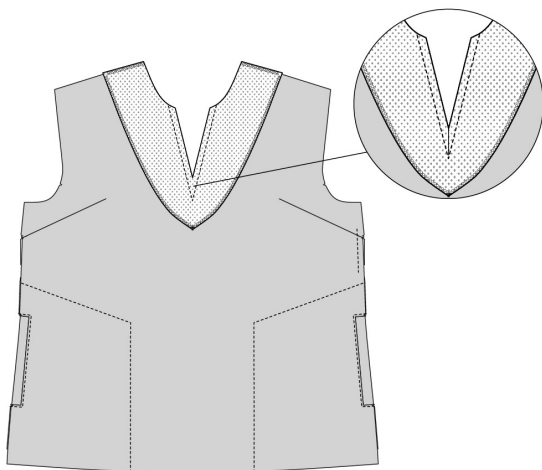


1. Sew front facing (4) to front at center front neckline opening, right sides together
2. Clip at center front to seam

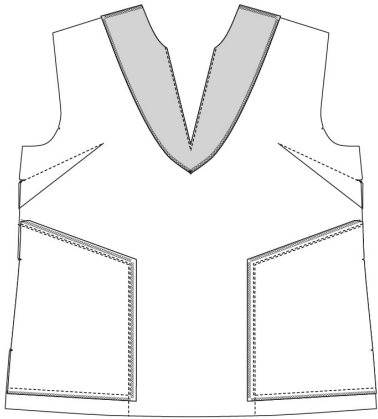


1. Under stitch at center front neckline opening
2. Press flat

BACK

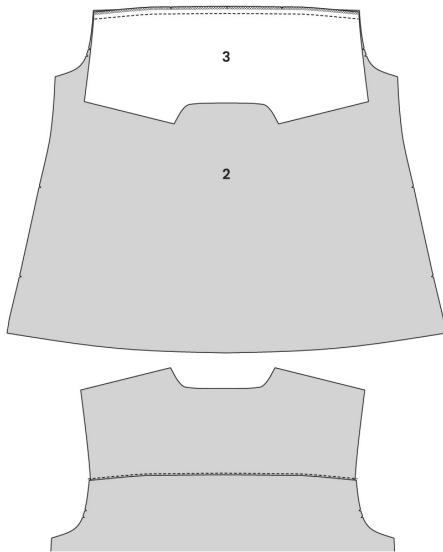


1. Sew back yoke (3) to back (2) right sides together, matching notches.
2. Finish edge.
3. Press seam up toward yoke.
4. Top stitch yoke seam 1/8" (.3175 cm) from edge. (optional)

SHOULDERS

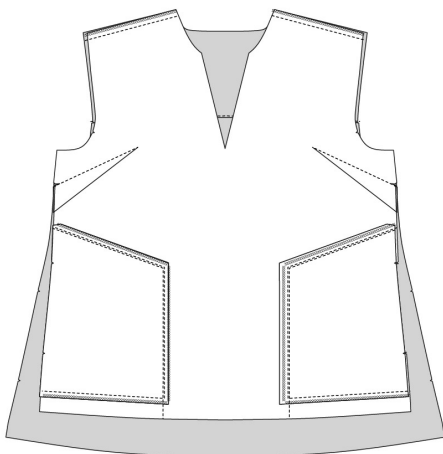


1. Sew front to back at shoulders, right sides together.
2. Finish edges.
3. Press seams toward back.


COLLAR

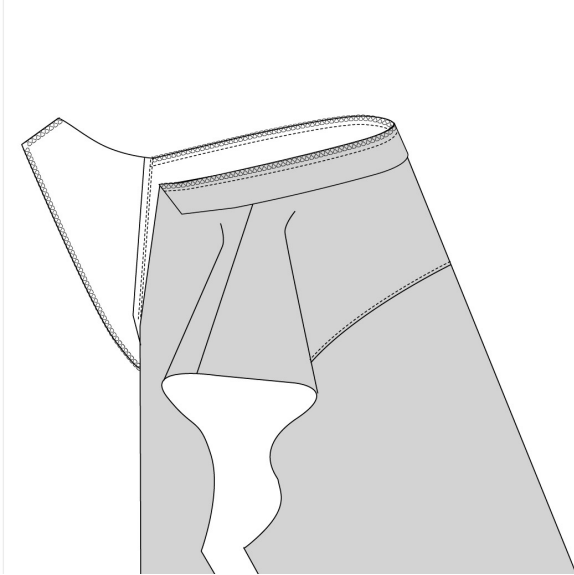

1. Sew collar (5) to neckline, right sides together, matching center back and notches. Raw edges of collar align with raw edge of neckline.

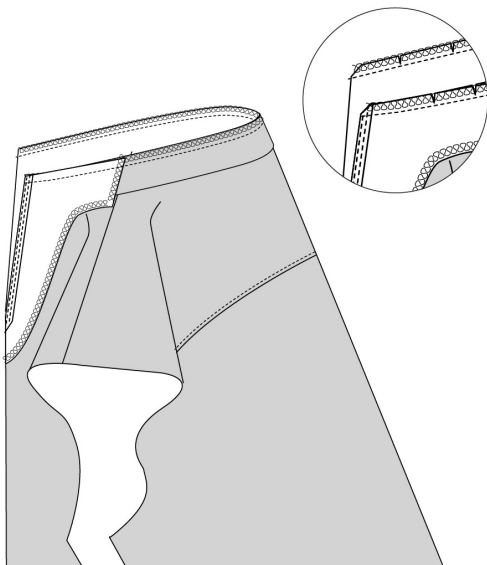


1. Sew front facing to front and back neckline, right sides together, sandwiching collar between facing and body. Match shoulder seams on body and facing.
2. Clip corner edge

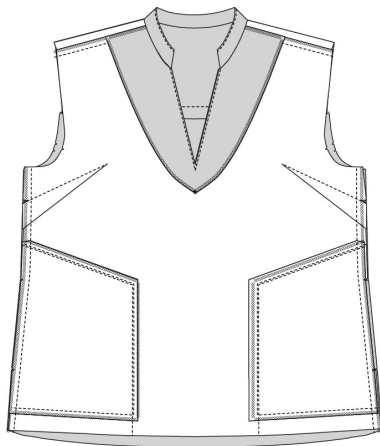


1. Turn facing right side out
2. Press flat
3. Tack down front facing at shoulder seam to keep in place


SLEEVE (SAME FOR BOTH VIEWS)

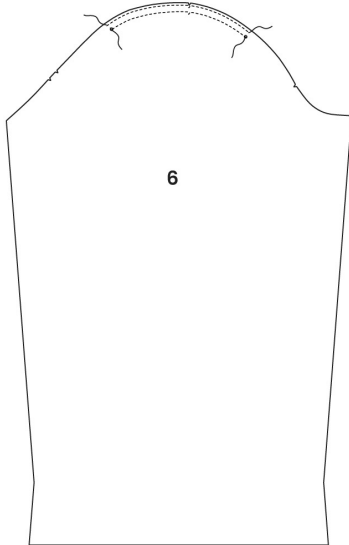


1. Stay stitch sleeve (6) two rows — one $\frac{1}{4}$ " (.635cm) and the other $\frac{1}{2}$ " (1.27cm) from sleeve cap edge — between front and back dots.
2. Gather sleeve cap between dots to fit armhole.

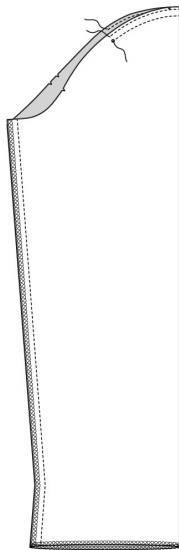

1. Sew sleeve seam RST
2. Finish both seam and bottom edges

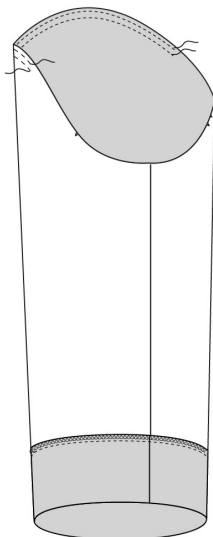


1. Fold bottom sleeve hem up 3" (7.62cm)
2. Press
3. Top stitch sleeve hem

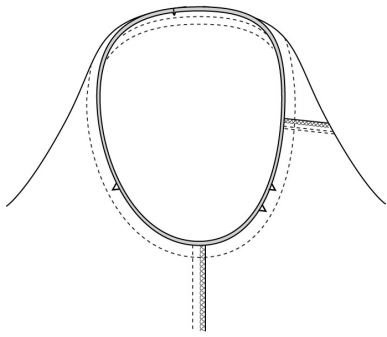


1. Matching notches, sew sleeve to body, right sides together.
2. Finish edges.


HEM

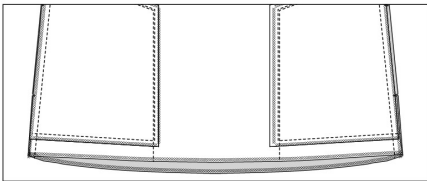

1. Finish bottom edge
2. Fold bottom hem up 1" (2.54 cm)
3. Press
4. Top stitch bottom hem

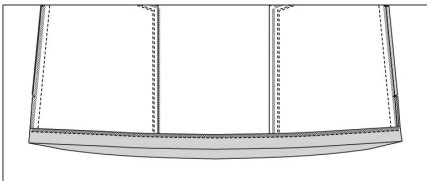

SHARE YOUR ISHAN TOP WITH US.
TAG US ON INSTAGRAM
TO SHARE YOUR MAKES!



@ COVERMECHIC

#COVERMECHICISHANTOP

EDGE STITCH

A stitch done a scant 1/8" from the folded or seamed edge.

NOTCH

Usually, the notch is shown on a pattern with a dark diamond. They should be matched on seams when joining for sewing.

TOP STITCH

A sometimes decorative, sometimes functional stitch that is usually 1/4" from the edge of a seam. For instance, once a vest is turned or a facing to a jacket is turned and pressed, one may stitch 1/4" from the edge on the top of the garment to provide a bit of stabilization. This can be done in same or contrasting thread, depending on the decorative effect one wishes to achieve.

RST

Sew the right side of the fabric together

RIGHT SIDE

The right side of the fabric is the design side. There are instances of fabric with no right or wrong side visible, and the determination and appropriate markings are then made by the person doing the pattern cutting and sewing.

WRONG SIDE

The wrong side of the fabric is the side upon which there is no design. There are instances of fabric with no wrong side visible, and the determination and appropriate markings are then made by the person doing the pattern cutting and sewing.

UNDER STITCH

A 1/8"-1/16" (.15875-.3175cm)stitch close to seam that sews through the facing or lining of a garment, etc. but not through the surface.

This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.